


Patch cords Duplex LSH/APC-SC

P/N: **P09D-LSHASC-xxx** OS2 singlemode 9/125 µm (ITU-T G.652.D)

Note. : patch cord length must be specified in the order.

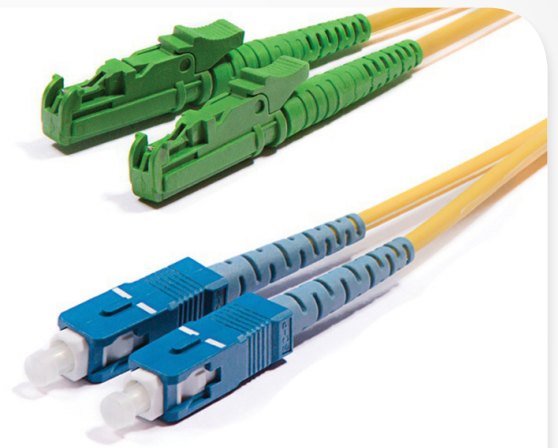

connector LSH properties

Connector LSH	singlemode OS2
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Insertion / extraction cycles	min. 1000

connector SC properties

Connector SC	singlemode OS2
Polishing	PC
Return loss	≥ 55 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Insertion / extraction cycles	min. 1000

cable properties

Cabled optical fibre	OS2
Nominal diameter core / sheath	9 / 125 µm
Color	yellow
Outer diameter	3 mm a 2 mm
Sheath material	LSOH
Bending radius (static)	45 mm
Temperature range	-20 °C to +70 °C
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	≤ 0,4 / ≤ 0,4 / ≤ 0,4

related products

P/N: RAB-FO-X37-SL	Sliding patch panel for 24 xSC-SC, LC-LC Duplex or E2000-E2000 adapters
P/N: KE-E2A-SM	E2000/APC-E2000/APC adapter
P/N: RAB-FO-X04	Splice cassette for 16 splices
P/N: F11002	Splice protection