



# 19“ server demountable cabinets RZA

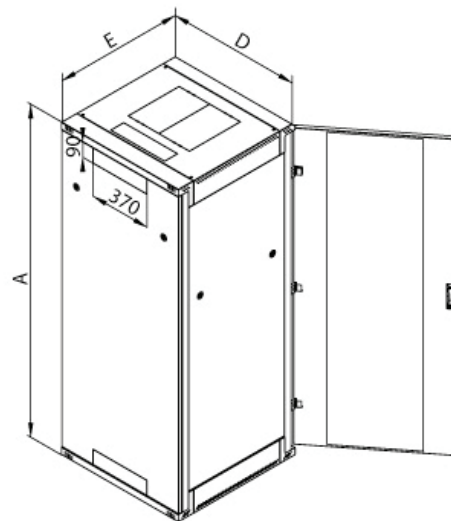

## features

- screwed construction with IP20 protection
- partial or complete dismantling enables installation to places difficult to reach
- removable and lockable side panels and rear cover enable an easy access to the installed devices
- front, central and rear vertical rails are continuously adjustable
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- breakout-type blanking panels for fan units are located in the top and bottom of the cabinet
- nivelation feet (standard)
- castors RAX-MS-X81-X1 and base with filter RAB-PO-XXX-XN, RAC-PO-XXX-XN available upon request
- stabilizing footing RAX-SS-X04-X1 available upon request (applies to cabinets with base only)
- the system enables sliding vertical rails installation in a span of 19", 21" or 23"
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1 pc)
- set of M6 screws and captive nuts (16 pcs)

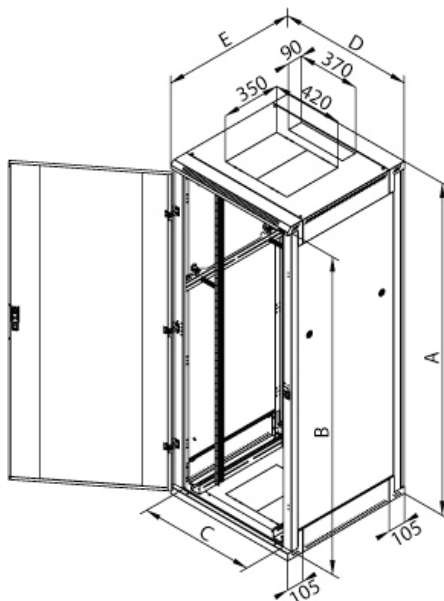

Color	black RAL9005
Surface	structured, matt



width 800 mm, depth 1000 mm

- perforated single door with air permeability of 80%

42U P/N: RZA-42-L81-BAY-A1-OZA

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
1970	1868	687	800	1000	105,8	400



width 800 mm, depth 1000 mm

- single door, hardened smoked glass

42U P/N: RZA-42-A81-BAY-A1-OZA

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
1970	1868	687	800	1000	110,8	400